


Installation sketch

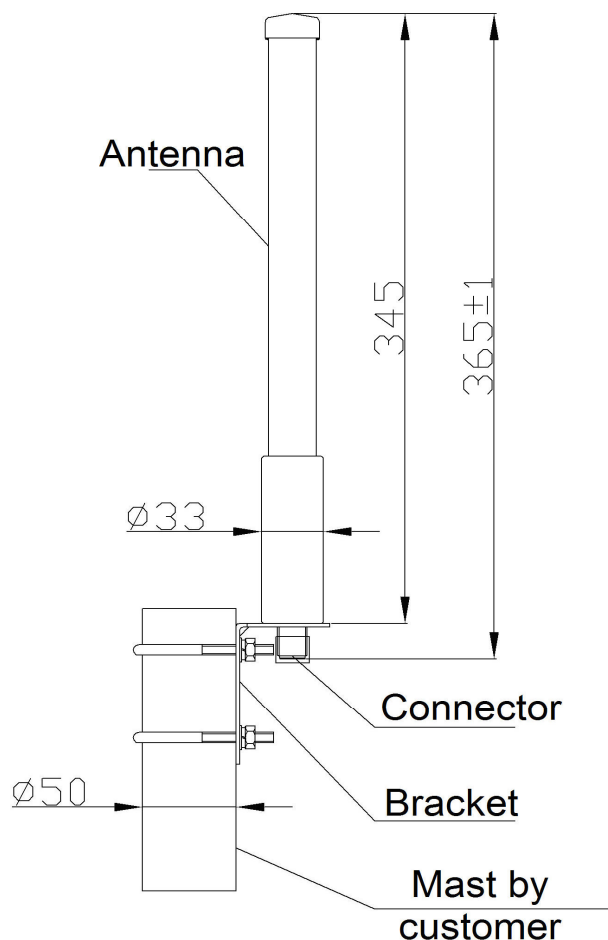

Applications

- CDMA800 / GSM900
- GSM1800
- PCS / PHS / 3G
- Community coverage

Features

- Medium gain
- Broad band
- High Quality Fiberglass Radome
- Supplied with mounting kits



Antenna Omnidirezionale 3G

Scheda Tecnica



Model	Antenna Omnidirezionale 3G		
Frequency Range-MHz	824~960	1710~1990	1900~2200
Gain -dBi	4.5	5	5.5
V Beam width-°	38	35	28
VSWR	≤2.0		
Impedance -Ω	50		
Polarization	Vertical		
Max. power-W	100		
Connector	N-K		
Dimension-mm	φ 33×365		
Weight-g	390 (No bracket included)		
Mast-mm	φ40~50		
Rated Wind Velocity-m/s	60		
Working temperature℃	-40 to +60		
Humidity%	5% to 95%		

